


Nexel at www.mh-partners.com sold by Indoff Nationwide sales@mh-partners.com



CASTERS AND DOLLIES

Stem Casters

Description: Black Nylon Twin Wheel, 1 3/4" x 2", 90 lb. capacity. 3/8"-16 Threaded Stem. Fits Standard Leveler Inserts.

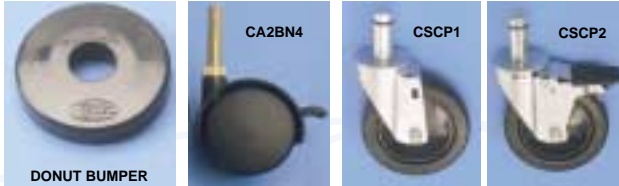

| Model No. | Type |
|-----------|------------------------------|
| CA2BN4 | Swivel, 2 w/Brake (Set of 4) |

Description: Resilient Rubber Wheel, 1 1/4" x 5", 200 lb. capacity.

| Model No. | Type |
|-----------|-----------------------------|
| CA5S4R | Swivel (Set of 4) |
| CSCP1 | Swivel (Each) |
| CA5BR4 | Swivel w/Brake (Set of 4) |
| CSCP2 | Swivel w/Brake (Each) |
| CA5SR | Swivel 2 w/Brake (Set of 4) |



Description: Polyurethane Wheels, 1 1/4" x 5", 300 lb. capacity

| Model No. | Type |
|-----------|------------------------------|
| CA5S4 | Swivel (Set of 4) |
| CSCP4 | Swivel (Each) |
| CA5BP4 | Swivel w/Brake (Set of 4) |
| CSCP5 | Swivel w/Brake (Each) |
| CA5SB | Swivel, 2 w/Brake (Set of 4) |
| ACS5RP* | Rigid (Each) |

Description: Pneumatic Wheel - 2.5" x 8", 300 lb. capacity.

| Model No. | Type |
|-----------|---------------|
| ACS8SN | Swivel (Each) |
| ACS8RN* | Rigid (Each) |

Note: Load capacity ratings are per caster. All Stem casters include donut bumpers, (except CA2BN4.)
* Requires Tie Bar-See Below

Tie Bars



Rigid stem casters require the use of a tie bar to assure rigid caster alignment. The bar connects the casters across the narrow width dimension of the cart or truck. For every two casters ordered, one tie bar must be used. Finished in chrome. The bar size must match shelf width.

| Model No. | Size" |
|-----------|-------|
| ATB18 | 18 |
| ATB21 | 21 |
| ATB24 | 24 |

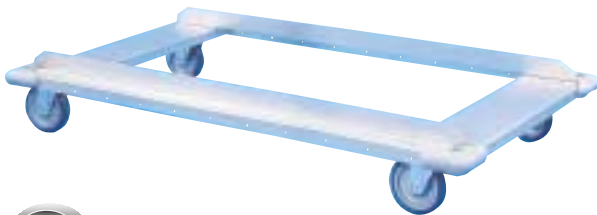


Plate Casters

| Model No. | Type | Wheel Size* | Plate Size** | Wheel Tread | Load Rating (lbs.) |
|-----------|----------------|-------------|---------------|----------------|--------------------|
| ACP5SR | Swivel | 5 x 2 | 3 7/8 x 4 1/2 | Mold on Rubber | 300 |
| ACP5BR | Swivel w/Brake | 5 x 2 | 3 7/8 x 4 1/2 | Mold on Rubber | 300 |
| ACP5RR | Rigid | 5 x 2 | 3 7/8 x 4 1/2 | Mold on Rubber | 300 |
| ACP5SP | Swivel | 5 x 1 1/4 | 4 1/2 x 3 3/4 | Polyurethane | 300 |
| ACP5BP | Swivel w/Brake | 5 x 1 1/4 | 4 1/2 x 3 3/4 | Polyurethane | 300 |
| ACP5RP | Rigid | 5 x 1 1/4 | 4 1/2 x 3 3/4 | Polyurethane | 300 |
| ACP6SR | Swivel | 6 x 2 | 2 5/8 x 3 5/8 | Mold on Rubber | 500 |
| ACP6RR | Rigid | 6 x 2 | 2 5/8 x 3 5/8 | Mold on Rubber | 500 |
| ACP6SP | Swivel | 6 x 2 | 3 7/8 x 4 1/2 | Polyolefin | 700 |
| ACP6BP | Swivel w/Brake | 6 x 2 | 3 7/8 x 4 1/2 | Polyolefin | 700 |
| ACP6RP | Rigid | 6 x 2 | 3 7/8 x 4 1/2 | Polyolefin | 700 |
| ACP8SR | Swivel | 8 x 2 | 4 x 4 1/2 | Pneumatic | 300 |
| ACP8RR | Rigid | 8 x 2 | 4 x 4 1/2 | Pneumatic | 300 |

Note: For overall height add approximately 1 1/2" to wheel size. Add 3" for 8" caster.
* 2 5/8" x 3 5/8" bolt spacing on mounting plates

Dolly Bases



Allows you to create a heavy duty, mobile shelving unit or cart. Constructed of durable formed steel, chrome plated finish. Includes corner bumpers. Casters must be ordered separately.

| Model No. | Size" |
|-----------|---------|
| DBC1836 | 18 x 36 |
| DBC1848 | 18 x 48 |
| DBC1860 | 18 x 60 |
| DBC2436 | 24 x 36 |
| DBC2448 | 24 x 48 |
| DBC2460 | 24 x 60 |
| DBC3036 | 30 x 36 |
| DBC3048 | 30 x 48 |